ESCADA DESLIZANTE

A professional sliding ladder made of aluminium, with 4.8cm rungs spaced 28cm apart. It has a 50cm-wide front entry and provides safe support during descent. Precise height adjustment by means of a rung-locking system. The ladder is fitted with 2 suspension hooks. Ideal for access to site cabins, skips and tanks.

TECHNICAL SPECIFICATIONS


- Number of rungs: 2x8 to 11+12;
- Step spacing: 28cm;
- Rung depth: 4.8cm;
- Front access width: 50cm;
- 2 retractable handrails: 1.00m;
- 2 suspension hooks: Ø6cm;
- Non-slip feet;
- User and maintenance manual;
- Identification label.

See the available components at www.jormax.com.



Escada Deslizante 2x8 rungs

How the rung-locking system works

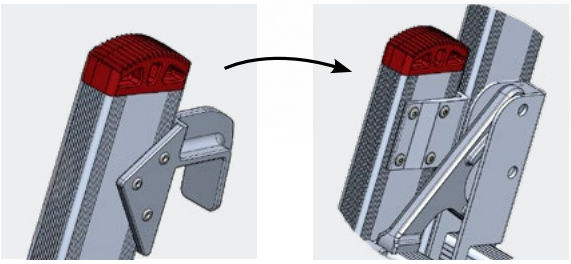

Decree-Law 50/2005 Portugal | Certified EN 131 Standard | professional use | 150 KG

No. of steps	8 + 8	9 + 9	11 + 12
Vertical height (on the wall) *(m)*	2.40 - 3.40	2.65 - 3.95	3.43 - 5.25
Closed ladder height *(m)*	2.57	2.85	3.69
Overall ladder height *(m)*	3.69	4.25	5.65
Width *(m)*	0.55	0.55	0.55
Weight *(kg)*	19.00	21.00	26.00
Reference	**20908**	**20909**	**20910**

When calculating the working height, allow 2m for the user with arms outstretched.