
KING KOMBO

This convertible fibreglass ladder can be used as a leaning ladder or in an A-frame position, and includes supports for working against columns or corners in both positions. It is fitted with an audible signal that alerts the user on reaching the bottom of the ladder, especially when descending backwards. The triangular-profile rungs have non-slip grooves and are riveted to the stiles, preventing twisting and deformation over time.

TECHNICAL SPECIFICATIONS

- 3-in-1 ladder;
- Rotating wall pad;
- V-bar for poles, corners and studs;
- Non-conductive Hi-Viz green fibreglass;
- Dual-purpose legs;
- Ground Cue system;
- Load capacity of 150 kg;
- Certificate of conformity with EN131;



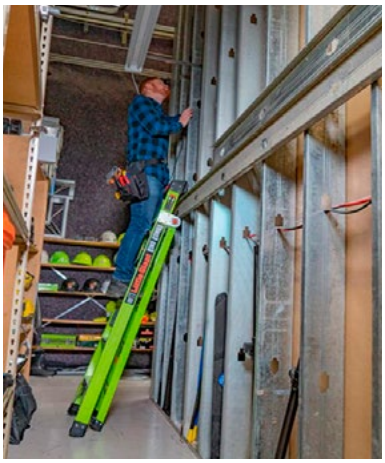



Usage positions
Usage positions | Positions d'utilisation



Little Giant® King Kombo™

Decree-Law 50/2005 Portugal | Certified EN 131 Standard | 1 year WARRANTY | professional use | 100 KG

No. of steps	5+4	6+5	8+6
Overall closed height *(m)*	1.45	1.80	2.45
Platform height *(m)*	1.42	1.70	2.25
Overall extended height *(m)*	2.63	3.00	4.20
Weight *(kg)*	10.50	11.50	14.50
Reference	**10631**	**10632**	**10633**