LOFT

Telescopic loft ladder with automatic closing, made of highly durable anodised aluminium. Designed for quick and easy installation. Wide access flight with 4cm rungs. Easy to open and close (simply release the safety hook). Requires only 1.40m clearance from the wall (ladder open). Designed for loft access.

TECHNICAL SPECIFICATIONS

- Number of rungs: 9 and 10;
- Step spacing: 28cm;
- Rung depth: 4cm;
- Distance to wall: 1.40m;
- Access angle: 65º (2.65m) and 75º (3.00m)
- Spring system (easier ladder closing);
- Non-slip PVC feet;
- Automatic closing system;
- User and maintenance manual;
- Certificate of conformity with EN131;
- Identification label.

OPTIONS

- Steel box (wooden lid)
  0.60 x 1.00
  0.60 x 1.20



Ladder fully closed



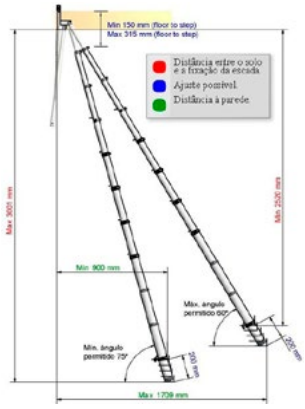



Loft 9 rungs

Decree-Law 50/2005 Portugal | Certified EN 131 Standard | 1 year WARRANTY | domestic use | 150 KG

No. of steps	9	10	10
Ceiling height *(m)*	2.25 - 2.45	2.52 - 2.65	2.65 - 3.01
Closed ladder dimensions *(m)*	0.52 x 0.60	0.52 x 0.92	0.52 x 1.00
Weight *(kg)*	15.30	16.60	16.60
Reference	**10766**	**10767**	**10768**