
MAXILADDER SUPER DUPLA E SUPER TRIPLA COM CORDA

Professional 2- and 3-section convertible ladder, for use in the leaning ladder position, made of ribbed extruded aluminium. With 3cm rungs spaced 28cm apart. Features a rope system for greater safety when climbing (easier and more ergonomic). Fully equipped ladder offering maximum comfort. Ideal for all types of professional work.

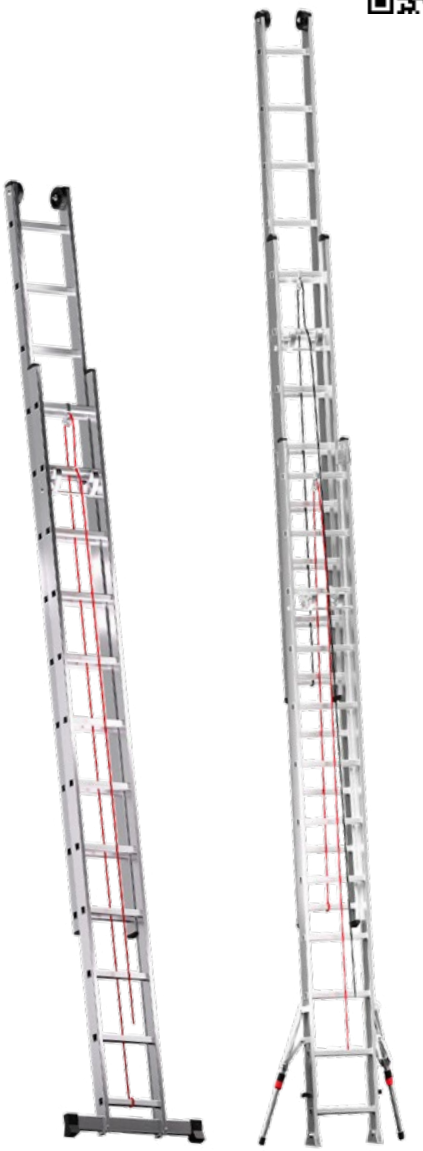

Maxiladder Super Dupla e Super Tripla com corda

TECHNICAL SPECIFICATIONS

- Number of rungs: 2x12 to 2x20/ 3x10 to 3x16;
- Rung spacing 28cm;
- Rungs: 30x30mm;
- Non-slip rungs;
- Non-slip stabiliser feet;
- Stabiliser bar (double) and stabilisers (triple);
- Sliding wheels;
- User and maintenance manual;
- Identification label.


See the available components at www.jormax.com.


What distinguishes the **MAXILADDER SUPER WITH ROPE?**

- Ladder with greater overall height
  - reaches maximum heights of **7.38m** and **10.09m**;
- Only used as a **leaning** ladder;
- Greater **safety** (rope system);



Wheels (detail)





Decree-Law 50/2005 Portugal | Certified EN 131 Standard | 5 years WARRANTY | professional use | 150 KG

MAXILADDER **SUPER DUPLA** WITH ROPE					
No. of steps	2 x 12	2 x 14	2 x 16	2x18	2x20
Overall closed height *(m)*	3.44	4.00	4.56	5.12	5.68
Overall extended height *(m)*	5.76	6.57	7.38	8.46	9.28
Closed width*(m)*	0.13	0.13	0.14	0.16	0.16
Profile *(mm)*	90 x 25	90 x 25	90 x 25	90 x 25	90 x 25
Weight *(kg)*	17.50	20.50	24.00	28.00	31.00
Reference	**10874.1**	**10874.2**	**10874.3**	**10874.4**	**10874.5**

MAXILADDER **SUPER TRIPLA** WITH ROPE			
3 x 10	3 x 12	3 x 14	3 x 16
2.88	3.44	4.00	4.56
6.57	7.38	9.01	10.09
0.19	0.21	0.24	0.24
90 x 25	90 x 25	90 x 25	90 x 25
22.00	28.00	35.00	39.00
10873.1	**10873.2**	**10875.1**	**10876.2**

When calculating the working height, allow 2m for the user with arms outstretched.