MAXILADDER TRIPLA

Professional 3-section convertible ladder: leaning ladder or stepladder position, made of ribbed extruded aluminium. With 28cm between rungs, it features an advanced automatic swaging system. The front section is 43cm wide and the wide section 48cm. Ideal for all types of professional work.

Mechanical version (with rope) available - SEE www.jormax.com

TECHNICAL SPECIFICATIONS

- Number of rungs: 3x6 to 3x14;
- Step spacing: 28cm;
- Closed width: 36.5cm;
- Non-slip rubber feet;
- Stabiliser base (from 3.00m in height);
- Safety strap preventing accidental opening;
- Certificate of conformity with EN131;
- User and maintenance manual;
- Identification label.


See the available components at www.jormax.com.

OPTIONS


- Sliding wheels



Maxiladder Tripla 3 x 6 rungs

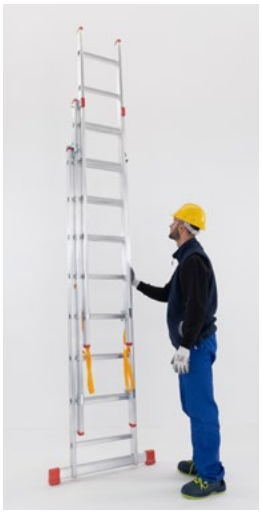





Decree-Law 50/2005 Portugal | Certified EN 131 Standard | 5 years WARRANTY | professional use | 150 KG

No. of steps	3 x 6	3 x 7	3 x 8	3 x 9	3 x 10	3 x 11	3 x 12	3 x 14
Height in stepladder position *(m)*	2.69	3.22	3.49	4.02	4.59	4.86	5.37	5.89
Overall extended height *(m)*	4.00	4.84	5.12	5.68	6.56	6.85	7.97	8.53
Closed ladder height *(m)*	1.80	2.08	2.36	2.64	2.92	3.20	3.48	4.04
Profile *(mm)*	65 x 25	65 x 25	65 x 25	65 x 25	73 x 25	73 x 25	80 x 25	80 x 25
Weight *(kg)*	12.00	14.00	16.00	17.00	21.00	23.00	25.00	30.00
Reference	**10187**	**10188**	**10189**	**10190**	**10191**	**10192**	**10193**	**10195**

When calculating the working height, allow 2m for the user with arms outstretched.