MULTIFLEX

Multi-function telescopic ladder made of ribbed extruded aluminium, for use in stepladder or leaning ladder position. With 30x30mm rungs spaced 28cm apart, an internal width of 37cm and a closed width of 21cm. Easy to transport and store. Ideal for professional work at different levels.

TECHNICAL SPECIFICATIONS

- Number of rungs: 4x3 to 4x6;
- Step spacing: 28cm;
- Rungs: 30x30mm;
- Internal stile profile: 65x25mm;
- External stile profile: 73x30mm;
- Internal width: 37cm;
- Closed width: 21cm;
- Steel hinges with anti-corrosion treatment;
- Stabiliser bar (optional);
- User and maintenance manual;
- Identification label.

See the available components at www.jormax.com.

OPTIONS

- Stabilisers
- Stabiliser bar

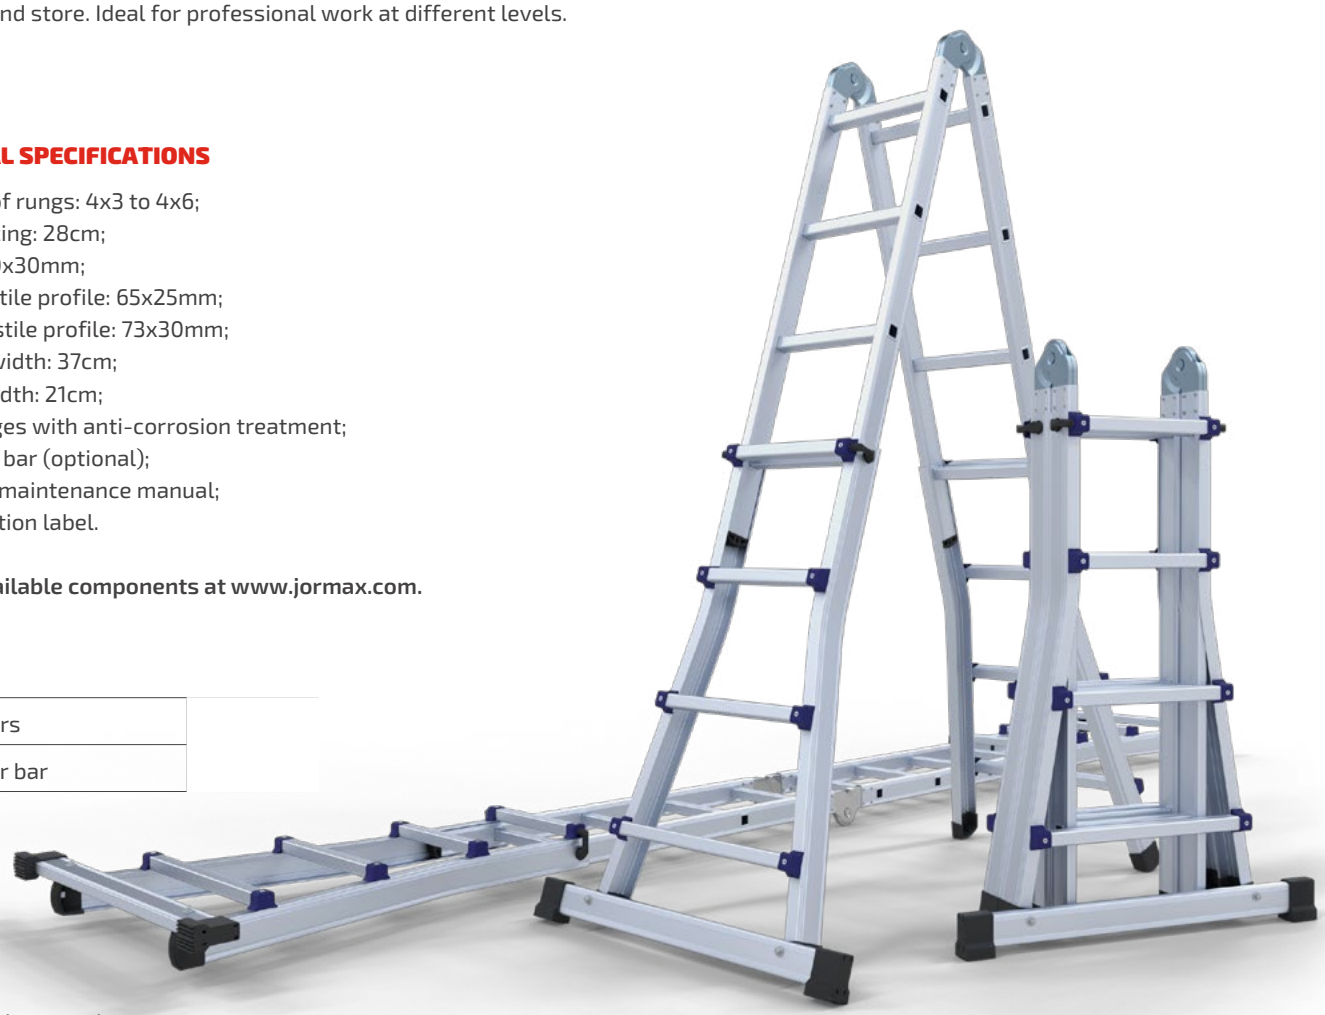

Multiflex 4 x 4 rungs

Stabilisers (optional)







No. of steps	4 x 3	4 x 4	4 x 5	4 x 6
Height in stepladder position *(m)*	0.90 - 1.44	1.19 - 1.72	1.47 - 2.00	1.75 - 2.28
Height in ladder position *(m)*	1.83 - 2.94	2.39 - 4.04	2.95 - 5.14	3.51 - 6.24
Minimum closed ladder height *(m)*	0.96	1.24	1.52	1.80
Weight *(kg)*	10.00	11.50	16.00	19.00
Reference	**10229**	**10230**	**10231**	**10232**

When calculating the working height, allow 2m for the user with arms outstretched.