TEMPO STAR

Scaffold from the “Tempo” range, with front or side access. Consists of a mobile Tempo tower and an integrated 45º ladder. Easy to assemble and transport, allowing different configurations to suit the customer's needs. Ideal for maintenance and repair work.

TECHNICAL SPECIFICATIONS

- Ladder step depth: 10cm;
- Platform height: 0.85 to 2.95m;
- Access ladder angle: 45º
- 3 different lengths: 2.00 - 2,50 - 3.00m;
- Width: 75 to 135cm;
- Ladder adjustable to various tower heights;
- Tower with adjustable feet: 70cm




Tempo Star - Side Access







Decree-Law 50/2005 Portugal | Certified EN 1004 Standard | UN EN287/1 EN ISO 96062 | 5 years WARRANTY | professional use | 200 KG

EXAMPLES OF DIFFERENT TEMPO STAR CONFIGURATIONS

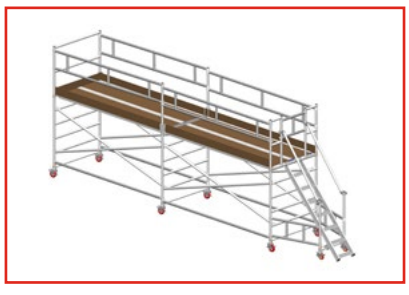




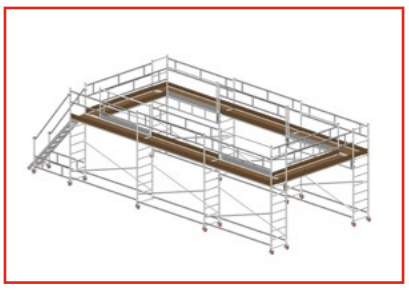

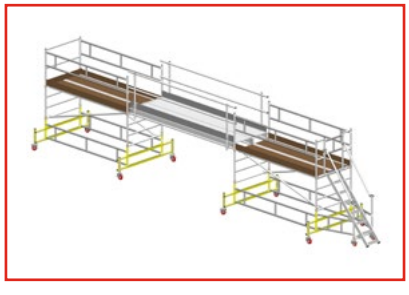



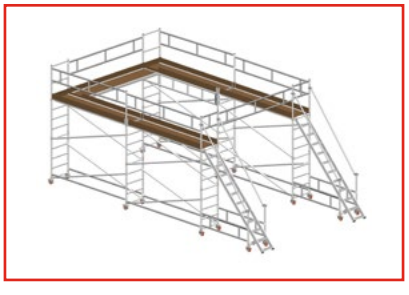



FRONT ACCESS

TEMPO STAR **S** (2.00 - 2.50 - 3.00 x **0.74m**)								
Platform height *(m)*	0.85	1.15	1.45	1.75	2.05	2.35	2.65	2.95
Overall height *(m)*	1.85	2.15	2.45	2.75	3.05	3.35	3.65	3.95
Working height *(m)*	2.85	3.15	3.45	3.75	4.05	4.35	4.65	4.95
Reference								
2.00m	**185200**	**215200**	**245200**	**275200**	**305200**	**335200**	**365200**	**395200**
2.50m	**185250**	**215250**	**245250**	**275250**	**305250**	**335250**	**365250**	**395250**
3.00m	**185300**	**215300**	**245300**	**275300**	**305300**	**335300**	**365300**	**395300**

TEMPO STAR **L** (2.00 - 2.50 - 3.00 x **1.35m**)								
Platform height *(m)*	0.89	1.19	1.49	1.79	2.09	2.39	2.69	2.99
Overall height *(m)*	1.89	2.19	2.49	2.79	3.09	3.39	3.69	3.99
Working height *(m)*	2.89	3.19	3.49	3.79	4.09	4.39	4.69	4.99
Reference								
2.00m	**189200**	**219200**	**249200**	**279200**	**309200**	**339200**	**369200**	**399200**
2.50m	**189250**	**219250**	**249250**	**279250**	**309250**	**339250**	**369250**	**399250**
3.00m	**189300**	**219300**	**249300**	**279300**	**309300**	**339300**	**369300**	**399300**



SIDE ACCESS

TEMPO STAR **S** (2.00 - 2.50 - 3.00 x **0.74m**)								
Platform height *(m)*	0.85	1.15	1.45	1.75	2.05	2.35	2.65	2.95
Overall height *(m)*	1.85	2.15	2.45	2.75	3.05	3.35	3.65	3.95
Working height *(m)*	2.85	3.15	3.45	3.75	4.05	4.35	4.65	4.95
Reference								
2.00m	**185200.1**	**215200.1**	**245200.1**	**275200.1**	**305200.1**	**335200.1**	**365200.1**	**395200.1**
2.50m	**185250.1**	**215250.1**	**245250.1**	**275250.1**	**305250.1**	**335250.1**	**365250.1**	**395250.1**
3.00m	**185300.1**	**215300.1**	**245300.1**	**275300.1**	**305300.1**	**335300.1**	**365300.1**	**395300.1**

TEMPO STAR **L** (2.00 - 2.50 - 3.00 x **1.35m**)								
Platform height *(m)*	0.89	1.19	1.49	1.79	2.09	2.39	2.69	2.99
Overall height *(m)*	1.89	2.19	2.49	2.79	3.09	3.39	3.69	3.99
Working height *(m)*	2.89	3.19	3.49	3.79	4.09	4.39	4.69	4.99
Reference								
2.00m	**189200.1**	**219200.1**	**249200.1**	**279200.1**	**309200.1**	**339200.1**	**369200.1**	**399200.1**
2.50m	**189250.1**	**219250.1**	**249250.1**	**279250.1**	**309250.1**	**339250.1**	**369250.1**	**399250.1**
3.00m	**189300.1**	**219300.1**	**249300.1**	**279300.1**	**309300.1**	**339300.1**	**369300.1**	**399300.1**