
VERTICAL COM SAÍDA

Professional vertical access ladder made of extruded aluminium, with 3cm rungs swaged into the stiles and spaced 28cm apart, with handrails (an extra 1.10m in height). Ideal for access to upper floors or any other elevated point in buildings. The use of access equipment does not replace proper training, instruction and the use of safety equipment to carry out the work.

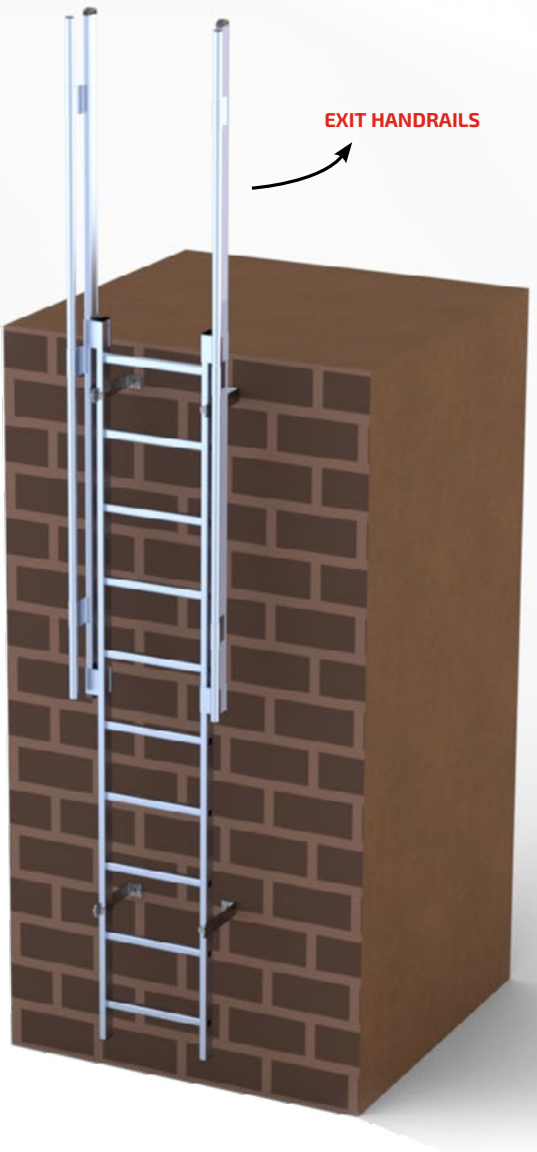


Vertical com saída 10 rungs

TECHNICAL SPECIFICATIONS

- Number of rungs: 7 to 17;
- Step spacing: 28cm;
- Step depth: 3cm;
- Profile: 65x25mm;
- External width: 45cm;
- Number of wall brackets: 4 to 6;
- Handrail height: 1.10m;
- Feet;
- User and maintenance manual;
- Certificate of conformity with the standards;
- Identification label.

Wall bracket operation

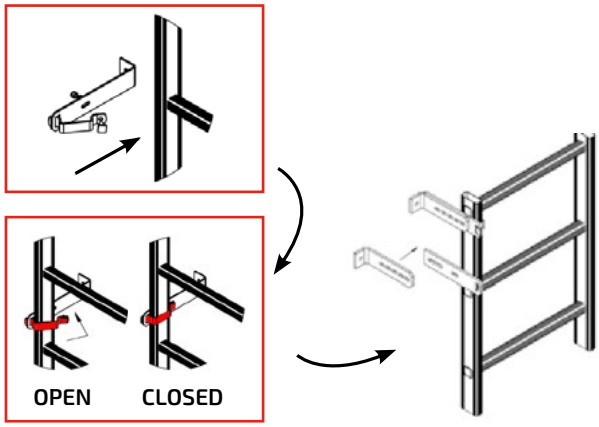

Decree-Law 50/2005 Portugal | Certified DIN 18799-1 Standard | 5 years WARRANTY | professional use | 150 KG

No. of steps	7	10	13	17
Top step height *(m)*	2.06	2.90	3.74	4.86
Overall height *(m)*	3.04	3.88	4.72	5.83
External width *(m)*	0.45	0.45	0.45	0.45
Weight *(kg)*	5.00	8.00	11.00	15.00
Reference	**10100**	**10103**	**10106**	**10108**

To comply with DIN18799-1, it must be fitted with safety hoops from 3.00m.

When calculating the working height, allow 2m for the user with arms outstretched.