

INDUSTRIAL DUPLO SPACE

Double step ladder climb with wide steps and wide 700x525 cm platform.

Stepladder professional use double made of ribbed aluminum, the rungs are welded to the amounts leading to a very solid and sturdy structure. They feature a large working platform. The operators work in comfort and safety.

TECHNICAL

- Distance between steps: 25 cm;
- Steps nonskid plans: 8 cm;
- Ability: 150 kg;
- Number of steps: 3 - 5;
- Heights in ladder: from 0,60 to 1,06 m.

EQUIPMENT

- Increased support platform (700x525 cm);
- Iron bar and anti-opening hinge;
- Non-slip rubber plates with ergonomic design;
- Reinforcements anti-flexion in larger steps;
- Use and maintenance manual;
- Certificate of conformity with EN 14183;
- Identification label.


OPTIONS

- Guard rails;
- Handrails (1 to 4 units per ladder);
- Wheel kit (2 or 4 units per ladder).

These accessories allow convenient and safe professional use:

- In optional aluminum rails, it is possible to step on the last step with feeling of safety and comfort on the part of the worker.
- The wheels (from 2 or 4 by ladder) allow you to carry the rapidly reducing time and effort stairs.
- The railing (1 unit from a ladder to 4) allows for a comfortable grip during ascent.
- Optional accessories are provided along with the stairs, straight from the factory. We recommend ordering the accessories along with the ladder.

*See page 23

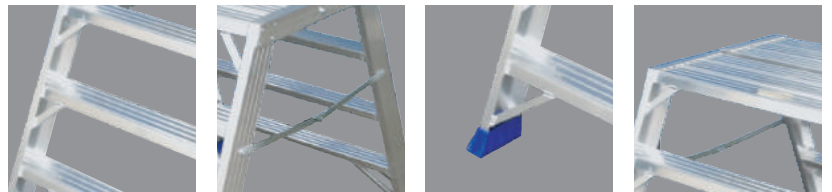

REF								KG	€
		m	m	m	cm	m	mm		
10850	2x3	0.60	0.45	2.60	77.30	0.22	80x25	9.20	
10851	2x4	0.83	0.69	2.80	79.30	0.22	80x25	12.00	
10852	2x5	1.06	0.93	3.00	83.00	0.22	80x25	14.80	

