

MAXILADDER TRIPLA

Three ladder transformable parts:
or step ladder support position.

Series of transformable ladders for professional use, made of ribbed extruded aluminum using an advanced automatic docking system of fixing permanently the steps to the amounts. Ladders are upscale, fully equipped, maximum comfort and optimal dimensions. Available in 1, 2 and 3 share is used both as supporting wall or ladder in position. The Maxiladder series is certified according to European standard EN 131.

TECHNICAL

- Number of steps: 6 - 20;
- Distance between steps: 28 cm;
- Width broad staircase: 48 cm;
- Intermediate ladder width: 43 cm;
- Closed width: 36,50 cm;
- Ladder height: from 2,52 to 7,16 m;
- Supported height: 11,40 m;
- Capacity: 150 kg.


EQUIPMENT

- Base stabilizer;
- Non-slip step;
- Internal reinforcement in nylon based stabilizer;
- Accidental anti-opening safety strap;
- Steel hardware with anticorrosion treatment;
- Non-slip rubber plates.

OPTIONS

- Sliding wheels.

Also available a mechanical version (with rope) that facilitates the opening of the upper stairs. The two parts stairs with rope can not be used in ladder position and does not have a stabilizing base.

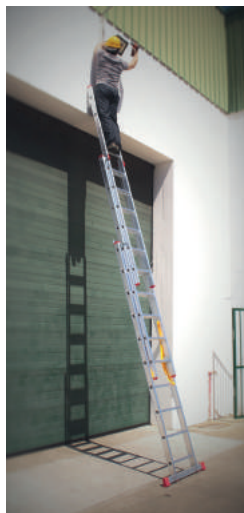

REF						KG	€
	m	m	m	mm			
10187	6	1.80	3.48	2.52	65x25	12.00	
10188	7	2.08	4.32	3.05	65x25	14.00	
10189	8	2.36	5.16	3.58	65x25	16.00	
10190	9	2.64	6.06	4.10	65x25	17.00	
10191	10	2.92	6.83	4.60	73x25	21.00	
10192	11	3.20	7.40	4.88	73x25	23.00	
10193	12	3.48	7.97	5.12	80x25	25.00	
10194	13	3.76	8.82	6.00	80x25	29.00	
10195	14	4.04	9.35	6.20	80x25	30.00	
10196	17	4.88	10.97	6.32	80x25	36.00	
10197	20	5.72	11.40	7.16	80x25	38.00	

Decree
50/2005
Law

Certificate
EN 131
Standards

5 years
WARRANTY

professional use