

# MULTIFLEX PLUS

Telescopic ladder reinforced multiposition.

Multipurpose telescopic ladder made of ribbed extruded aluminum and reinforced. The aluminum hinges act as rapid positioning of joints allowing you to work in a position of a step ladder or support on the wall.

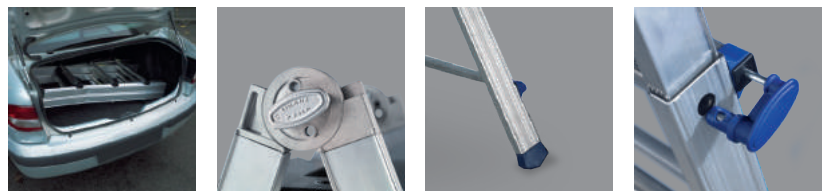
## TECHNICAL







- Number of steps: 8-12;
- Distance between steps: 28 cm;
- Depth steps: 27 cm;
- Profile internal amount: 63x27 mm;
- Profile external amount: 70x31 mm;
- Ladder height: from 1,91 to 2,94 m (each 28,60 cm);
- Wall height: from 4,01 to 6,25 m (each 28,60 cm);
- Capacity: 150 kg.

## EQUIPMENT

- Fast positioning aluminum hinges;
- Steel blocking hooks covered in nylon;
- Non-slip ergonomic rubber plates, for maximum adherence to the ground;
- Handle hinge aluminum with three bolts in steel;
- Tool holder tray nylon 31x36 cm;
- Use and maintenance manual;
- Certificate of conformity with standard EN 131;
- Identification label.

## OPTIONS



REF							KG	€
		m	m	m	m	m		
30770	8 + 8	4.01	1.22	1.91	0.63	0.15	12.00	
30771	10 + 10	5.15	1.50	2.44	0.63	0.15	14.20	
30772	12 + 12	6.25	1.78	2.94	0.75	0.15	17.50	

