

MULTIFLEX


Multiposition telescopic ladder.

Multipurpose telescopic ladder made of ribbed extruded aluminum using an advanced system of crimped steps that are fixed permanently in the figures.

Steel hinges with corrosion treatment, act as joint rapid deployment, allowing you to work in a position of a step ladder or support on the wall. You can also perform work at different levels surpassing stairs and other obstacles. Easy transport and storage thanks to its telescopic capability. sizes 6, 8 and 10 steps are approved according to EN 131.

TECHNICAL


- Number of steps: 12-20;
- Distance between steps: 28 cm;
- Profile internal amount: 65x25 mm;
- Profile external amount: 72x30 mm;
- Internal width: 36,50 cm;
- Ladder height: from 1,40 to 3,45 m;
- Wall height: from 2,90 to 5,73 m;
- Steps striated non-slip: 30x30 mm;
- Capacity: 150 kg (up to size 8 steps).

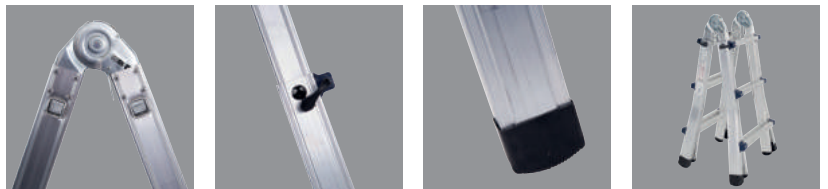

4x4



REF		min. m	max. m	m	min. m	max. m	m	KG	€
10229	4x3	1.80	2.90	0.94	0.88	1.40	0.21	10.00	
10230	4x4	2.35	4.03	1.22	1.14	1.93	0.21	11.50	
10231	4x5	2.90	5.14	1.50	1.40	2.72	0.21	16.00	
10232	4x6	3.48	5.73	1.78	1.67	3.45	0.21	19.00	



Four positions of use.

