TEMPO ADVANCE

Scaffold for professional use, made of fully insulating Ø50.80mm fibreglass tube. Its small number of components makes transport and assembly easy. The platforms have trapdoors for internal access. Tested at 1000 volts. Corrosion-resistant. Ideal for the electrical and industrial sectors, live working, chemical environments and maintenance.

TECHNICAL SPECIFICATIONS

- Width: 2.00 / 2.50m;
- Fibreglass tube: Ø50.80mm;
- Maximum indoor height: 12.00m
- Maximum outdoor height: 8.00m;
- 4 nylon wheels with brake: Ø20cm;
- Module heights: 1.00, 1.50 and 2.00m;
- 4 wheels with brake: Ø200mm;
- Platform with marine plywood deck;
- Levelling feet to compensate for uneven ground;
- User and maintenance manual;
- Identification label.



Tempo Advance 1 platform

Decree-Law 50/2005 Portugal | Certified EN 1004 Standard | UN EN287/1 EN ISO 96062 | 5 years WARRANTY | professional use | 200 KG/m²



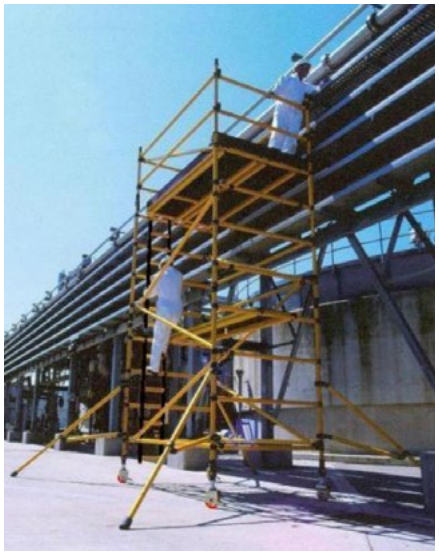



Number of platforms	1	1	1	1	1	2	2	2
Platform height *(m)*	1.20	1.70	2.20	2.70	3.20	3.70	4.20	4.70
Overall height *(m)*	2.20	2.70	3.20	3.70	4.20	4.70	5.20	5.70
Working height *(m)*	3.20	3.70	4.20	4.70	5.20	5.70	6.20	6.70
Reference								
2.00 x 0.85m	**11600**	**11601**	**11602**	**11603**	**11604**	**11605**	**11606**	**11607**
2.00 x 1.45m	**11620**	**11621**	**11622**	**11623**	**11624**	**11625**	**11626**	**11627**
2.50 x 0.85m	**11640**	**11641**	**11642**	**11643**	**11644**	**11645**	**11646**	**11647**
2.50 x 1.45m	**11660**	**11661**	**11662**	**11663**	**11664**	**11665**	**11666**	**11667**

Number of platforms	2	2	2	2	2	2	3	3
Platform height *(m)*	5.20	5.70	6.20	6.70	7.20	7.70	8.20	8.70
Overall height *(m)*	6.20	6.70	7.20	7.70	8.20	8.70	9.20	9.70
Working height *(m)*	7.20	7.70	8.20	8.70	9.20	9.70	10.20	10.70
Reference								
2.00 x 0.85	**11608**	**11609**	**11610**	**11611**	**11612**	**11613**	**11614**	**11615**
2.00 x 1.45	**11628**	**11629**	**11630**	**11631**	**11632**	**11633**	**11634**	**11635**
2.50 x 0.85	**11648**	**11649**	**11650**	**11651**	**11652**	**11653**	**11654**	**11655**
2.50 x 1.45	**11668**	**11669**	**11670**	**11671**	**11672**	**11673**	**11674**	**11675**