TEMPO L - 1.35m wide

Professional mobile scaffold made of Ø 50mm aluminium tube. Easy to transport and assemble, with no tools required. Available in 3 different lengths: 2m, 2.50m and 3m. Access is from inside the scaffold, using the rungs of the side ladders. Ideal for maintenance and repair work.



Tempo L - 1.35m wide

TECHNICAL SPECIFICATIONS

- Width: 1.35m;
- Tube Ø50mm;
- Length: 2.00, 2.50 or 3.00m;
- Maximum working height: 13.99m;
- Wheels with brake: Ø 150mm;
- Capacity for 2 people + tools;
- Step spacing: 30cm;

EQUIPMENT

- 4 nylon wheels with double pedal brake (Ø 125, 150 or 200mm);
- Threaded adjustable feet to compensate for uneven ground (15, 40 or 70cm)
- Frame heights: 1.20 - 1.50 - 1.80 - 2.10m;
- Platform with aluminium frame, in non-slip marine plywood, with toeboards, trapdoor and wind-lock hook;
- User and maintenance manual and certificate of conformity with EN1004





Decree-Law 50/2005 Portugal | Certified EN 1004 Standard | UN EN287/1 EN ISO 96062 | 5 years WARRANTY | professional use | 200 KG

NOTES (see table)

4 Ø 150mm wheels, 4 adjustable spindle feet 400mm, 4 stabilisers according to the scaffold height, 2 horizontal braces, diagonal braces in each module with their frames and work platforms. Configurations are built up in height with as many 2.10m frames as possible. The stabilisers can be P, M or G, according to the scaffold height.


The scaffold includes a toeboard for the top platform from 2.05m in height. For work on intermediate platforms, extra toeboards must be ordered. See components on the following pages.

* Maximum height permitted by the European Standard for work outside buildings.
**Maximum height permitted by the European Standard for work inside buildings.

BUILDING				COMPONENTS								REFERENCES		
Plat.	Total.	Work.	Diag.	Module 2.10m	Module 1.80m	Module 1.50m	Module 1.20m	Plat. Compl.	Toe-boards	Hand-rails	Stabil.	2.00m	2.50m	3.00m
0.59	2.10	2.59	4		2			1		2		10462.1	10497.1	10532.1
0.89	2.40	2.89	4	2				1		2		10462.2	10497.2	10532.2
1.19	2.70	3.19	8				4	1		2		10462.3	10497.3	10532.3
1.49	3.00	3.49	8			2	2	1		2		10462.4	10497.4	10532.4
1.79	3.30	3.79	8		2		2	1	1	2	4P	10462.5	10497.5	10532.5
2.09	3.60	4.09	8	2			2	1	1	2	4P	10462	10497	10532
2.39	3.90	4.39	8	2		2		1	1	2	4P	10463	10498	10533
2.69	4.20	4.69	8	2	2			1	1	2	4P	10464	10499	10534
2.99	4.50	4.99	8	4				1	1	2	4P	10464.1	10499.1	10534.1
3.29	4.80	5.29	12	2			4	1	1	2	4P	10465	10500	10535
3.59	5.10	5.59	12	2		2	2	2	1	2	4P	10466	10501	10536
3.89	5.40	5.89	12	2		4		2	1	2	4P	10467	10502	10537
4.19	5.70	6.19	12	4			2	2	1	4	4P	10468	10503	10538
4.49	6.00	6.49	12	4		2		2	1	4	4P	10469	10504	10539
4.79	6.30	6.79	12	4	2			2	1	4	4P	10470	10505	10540
5.09	6.60	7.09	12	6				2	1	4	4P	10471	10506	10541
5.39	6.90	7.39	16	4			4	2	1	4	4P	10472	10507	10542
5.69	7.20	7.69	16	4		2	2	3	1	4	4P	10473	10508	10543
5.99	7.50	7.99	16	4		4		3	1	4	4P	10474	10509	10544
6.29	7.80	8.29	16	6			2	3	1	4	4P	10475	10510	10545
6.59	8.10	8.59	16	6		2		3	1	4	4P	10476	10511	10546
6.89	8.40	8.89	16	6	2			3	1	4	4M	10477	10512	10547
7.19	8.70	9.19	16	8				3	1	4	4M	10478	10513	10548
7.49	9.00	9.49	20	6			4	3	1	4	4M	10479	10514	10549
7.79*	9.30*	9.79*	20	6		2	2	4	1	4	4M	10480	10515	10550
8.09	9.60	10.09	20	6		4		4	1	6	4M	10481	10516	10551
8.39	9.90	10.39	20	8			2	4	1	6	4M	10482	10517	10552
8.69	10.20	10.69	20	8		2		4	1	6	4M	10483	10518	10553
8.99	10.50	10.99	20	8	2			4	1	6	4M	10484	10519	10554
9.29	10.80	11.29	20	10				4	1	6	4M	10485	10520	10555
9.59	11.10	11.59	24	8			4	4	1	6	4M	10486	10521	10556
9.89	11.40	11.89	24	8		2	2	5	1	6	4M	10487	10522	10557
10.19	11.70	12.19	24	8		4		5	1	8	4M	10488	10523	10558
10.49	12.00	12.49	24	10			2	5	1	10	4M	10489	10524	10559
10.79	12.30	12.79	24	10		2		5	1	10	4M	10490	10525	10560
11.09	12.60	13.09	24	10	2			5	1	10	4M	10491	10526	10561
11.39	12.90	13.39	24	12				5	1	10	4M	10492	10527	10562
11.69	13.20	13.69	28	10			4	5	1	10	4M	10493	10528	10563
11.99**	13.50	13.99	28	10		2	2	6	1	10	4M	10494	10529	10564

TEMPO S & L ADDITIONAL INFORMATION

COMPOSITION OF TEMPO S & TEMPO L SCAFFOLDS

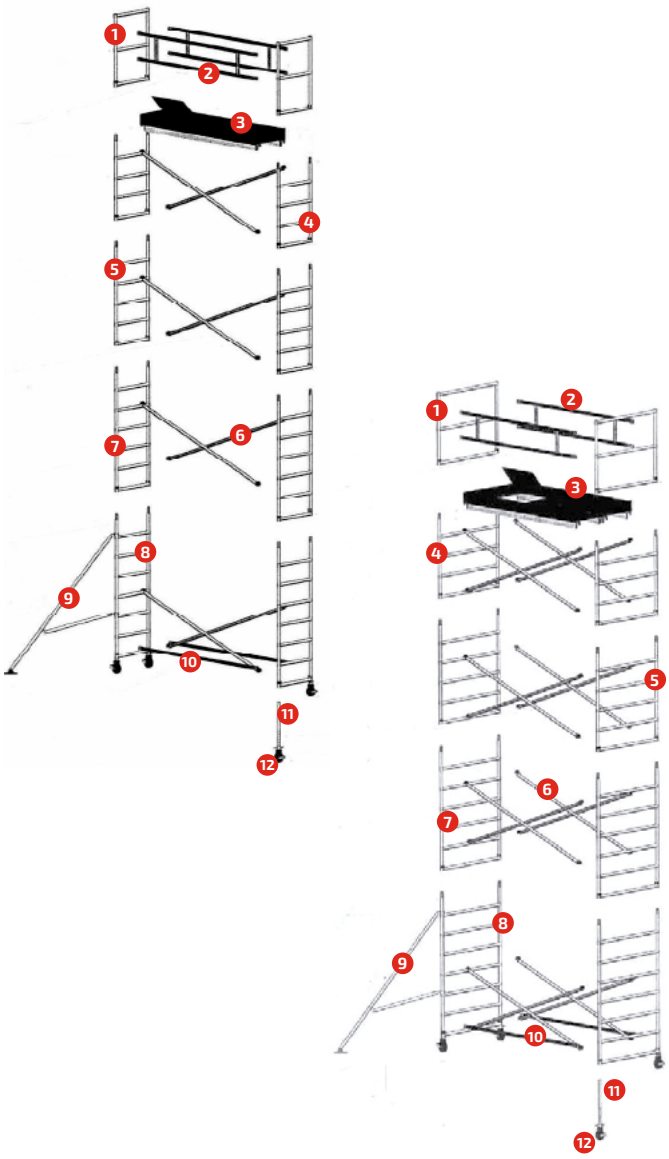

		TEMPO S	TEMPO L
1	END FRAME 2.00 - 2.50 - 3.00m	10567	10572
2	HANDRAIL 2.00 - 2.50 - 3.00m	10579 10582 10585	10579 10582 10585
3	WORK PLATFORM WITH TRAPDOOR AND TOEBOARDS 2.00 - 2.50 - 3.00m	10586/ 10589 10590/ 10593 10594/ 10597	10586/ 10588 10590/ 10592 10594/ 10596
4	4-RUNG FRAME (2.00 - 2.50 - 3.00m)	10568	10573
5	5-RUNG FRAME (2.00 - 2.50 - 3.00m)	10569	10574
6	DIAGONAL BRACE (2.00 - 2.50 - 3.00m)	10578 10581 10584	10578 10581 10584
7	6-RUNG FRAME (2.00 - 2.50 - 3.00m)	10570	10575
8	7-RUNG FRAME (2.00 - 2.50 - 3.00m)	10571	10576
9	STABILISER (Small - Medium - Large - Telescopic)	-------- 10605 10606 10607	10608 10609 10610 10611
10	HORIZONTAL BRACE (2.00 - 2.50 - 3.00m)	10577 10580 10583	10577 10580 10583
11	ADJUSTABLE FOOT (150 - 400 - 700mm)	10598 10599 10600	10598 10599 10600
12	WHEEL (Ø 125 - 150 - 200mm)	10601 10602 10603	10602 10603




Aluminium wall tie (component)

Aluminium wall tie for 50mm-diameter tube, 50cm long (other sizes on request). The European standard requires wall ties from a platform height of 8m when the scaffold is used outdoors, and 12m when it is used indoors.

Reference: 10614,

FRAMES




Reference					
TEMPO **S**	10571	10570	10569	10568	10567
TEMPO **L**	10576	10575	10574	10573	10572
Height *(m)*	2.10	1.80	1.50	1.20	1.09
Width *(m)*					
TEMPO **S**	0.74	0.74	0.74	0.74	0.74
TEMPO **L**	1.35	1.35	1.35	1.35	1.35

BRACES




Reference	Horizontal brace **2.00m**	Diagonal brace **2.00m**	Handrail **2.00m**
	10577	10578	10579
	Horizontal brace **2.50m**	Diagonal brace **2.50m**	Handrail **2.50m**
	10580	10581	10582
	Horizontal brace **3.00m**	Diagonal brace **3.00m**	Handrail **3.00m**
	10583	10584	10585

TELESCOPIC ADJUSTABLE SPINDLE FEET




Reference	10598	10599	10600

STABILISER



Reference					
TEMPO **S**	10604	10605	10606	10607	10607.1
TEMPO **L**	10608	10609	10610	10611	10611.1
Indoor height *(m)*					
TEMPO **S**	6.25	11.95	11.95	11.95	11.95
TEMPO **L**	11.99	11.99	11.99	11.99	11.99
Outdoor height *(m)*					
TEMPO **S**	-----	5.00	7.75	5.05	7.75
TEMPO **L**	-----	5.39	7.79	5.39	7.79
Model	"P" fixed	"M" fixed	"G" fixed	"TM" telescopic	"TG" telescopic
Width *(m)*	1.50	2.80	3.60	1.70 - 2.80	2.30- 3.40

SWIVEL WHEEL



Reference	10601	10602	10603

INTERNAL LADDER WITH HOOK

Reference	
SINGLE **LADDER**	10612
DOUBLE **LADDER**	10613
Length *(m)*	
SINGLE **LADDER**	2.40
DOUBLE **LADDER**	3.60

PLATFORMS



Reference	10586	10587	10588	10589	10590	10591	10592	10593	10594	10595	10596	10597
Length *(m)*	2.00	2.00	2.00	2.00	2.50	2.50	2.50	2.50	3.00	3.00	3.00	3.00
Platform	Platform with trapdoor	Platform no trapdoor	Set of L toeboards	Set of S toeboards	Platform with trapdoor	Platform no trapdoor	Set of L toeboards	Set of S toeboards	Platform with trapdoor	Platform no trapdoor	Set of L toeboards	Set of S toeboards